


THREEFOLD VERTICAL SCISSORS

The construction method with multiple scissor systems over each other allows high lift travels with relatively small platform dimensions.

This model is always used where great height differences must be overcome but the installation room is limited.

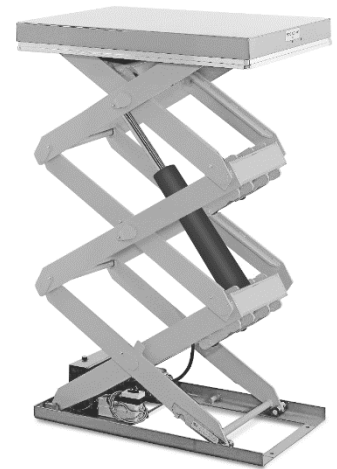

Type	Lifting capacity kg	Lifting height mm	Closed Height mm	Length mm	Width mm	Lifting time sek.	Power kW	Weight kg
2533	500	1500	400	900	650	26	0,37	160
2555	1500	2400	550	1300	900	40	2,20	460
2566	1500	3300	600	1700	1200	65	2,20	1100
2577	1500	3300	600	1700	1500	65	2,20	1150
2588	1500	4500	800	2400	1500	42	5,50	1600
2589	1500	5700	1000	3200	2000	70	5,50	3785
2590	2000	7000	1015	4000	2000	75	7,50	4175
2591	2500	4000	1000	2500	1500	88	7,50	2665
2592	2500	4500	800	2400	1500	42	7,50	2400